



Novaris®

Three Phase DINsafe Surge Filters



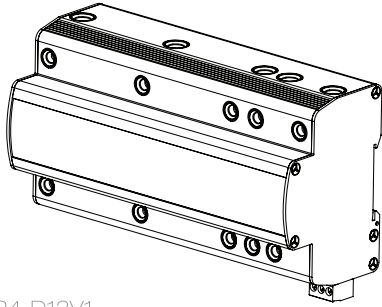


Uc	~275V
Up (AS/NZS)	< 600V
# Ports	One
t _A	< 5ns
Protection	L-N, L-PE, N-PE
I _{PE}	< 10uA
Mounting	TS35 DIN rail
Location	Indoor
Environmental	IP20
	-40° to +70°C 5 to 95% (non-condensing)

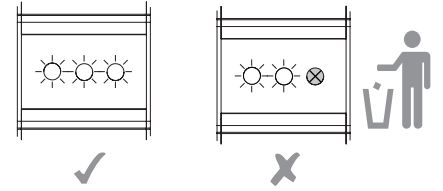


IEC 61643-11 class II
 DIN VDE 0675-6-11 class C
 AS/NZS 1768 categories B, C
 IEEE C62.41 categories B, C



0024-D13V1

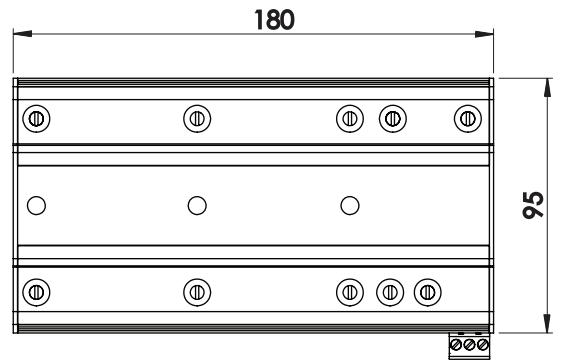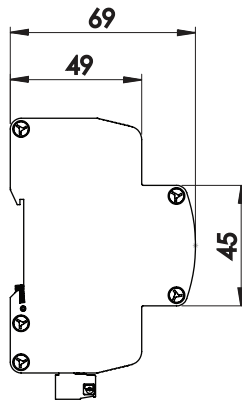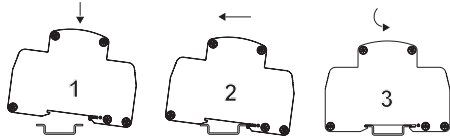


Power	
min L, N, PE	2,5 mm ²
max L, N, PE	16 mm ²

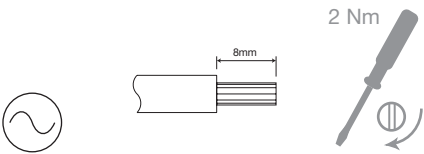

Alarm	
C, NC, NO	≤ 2,5 mm ²

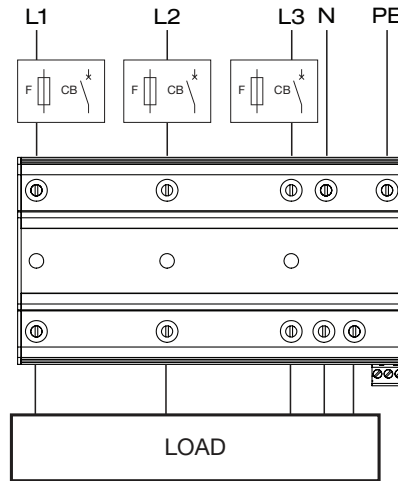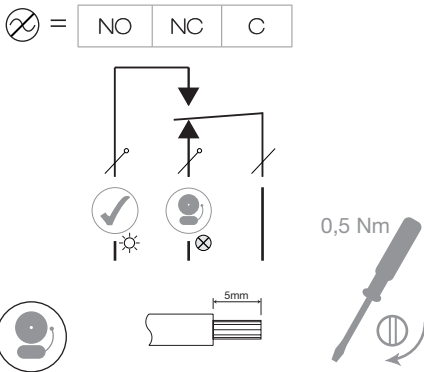

TN / TT / IT system with neutral

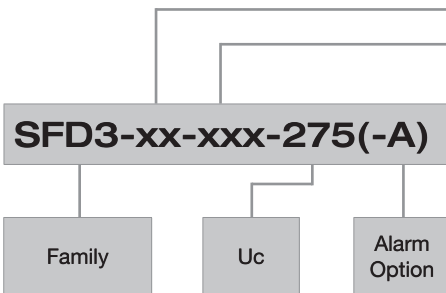

Value	I _{max} per phase Max impulse 1x 8/20us	I _n per phase Nom impulse 15 x 8/20us	I _{SCCR} Max switchboard fault rating
50	50kA	20kA	25kA

Value	F max	CB max
6	6 A gL/gG	6 A "C"
10	10 A gL/gG	10 A "C"
20	20 A gL/gG	20 A "C"

Australian Designed