Install Manual

IDE3-200-D480

Installation

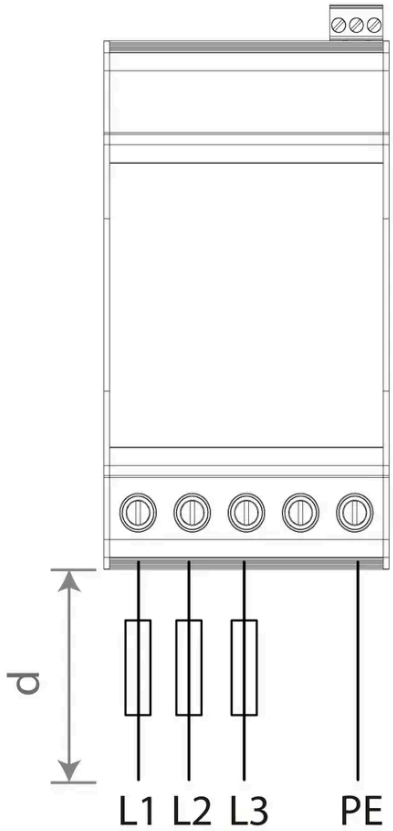

Before starting installation check the connection wires, if there are 3 wires and an earth you have the correct SPD, if there are 4 wires with a neutral and an earth then it is not the correct SPD. Consult the Novaris product handbook or contact your local distributor for more information.

$d + d \leq 0.5m$

Alarm



11-12 open 11-14 closed	Power On
11-12 closed 11-14 open	Power Off

Terminals

Terminal Type		
min Capacity	2.5 mm²	0.5 mm²
max Capacity	16 mm²	2.5 mm²
Torque	2 Nm	0.6 Nm
Strip Length	12mm	5mm

Mounting Information

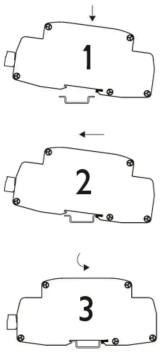

Electrical Specifications

Connection type		Shunt
Maximum backup fuse		100A
Recommended SCB		SCB1-3-25
Earth leakage current	I_{PE}	<10µA

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20

Generated Wed Aug 06 2025

72 Browns Road, Kingston Tasmania 7050 Australia
+61 3 6229 7233 sales@novaris.com.au
www.novaris.com.au