


Install Manual

IDD3-50-D480




Image for illustrative purposes only

Installation

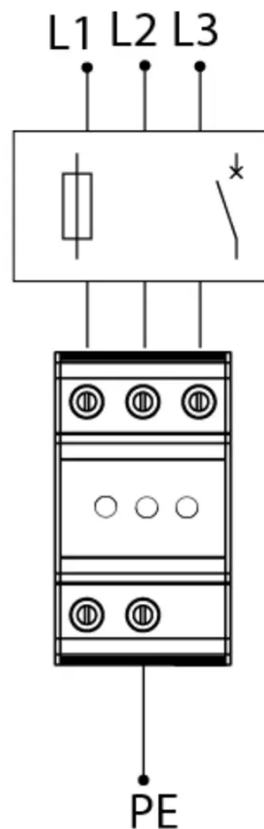


Terminal Information

Terminal Type


min Capacity 2.5 mm²max Capacity 16 mm²

Torque 2 Nm


Strip Length



Dimensional Diagram

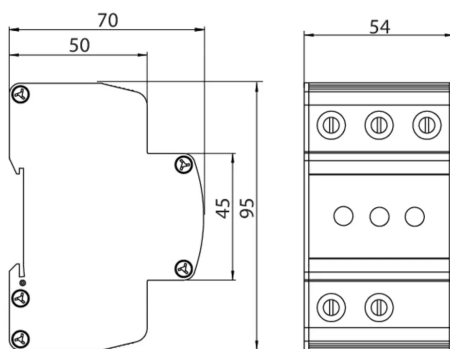

Mounting



Electrical Specifications

Connection type		Shunt
Location		Indoor
Nominal voltage	U_0	400VAC
Short circuit withstand level	I_{scCR}	25kA
Maximum backup fuse		32A
Recommended SCB		SCB1-3-80
Earth leakage current	I_{PE}	<10μA

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20