SDD3-100-275

Image for illustrative purposes only

Installation

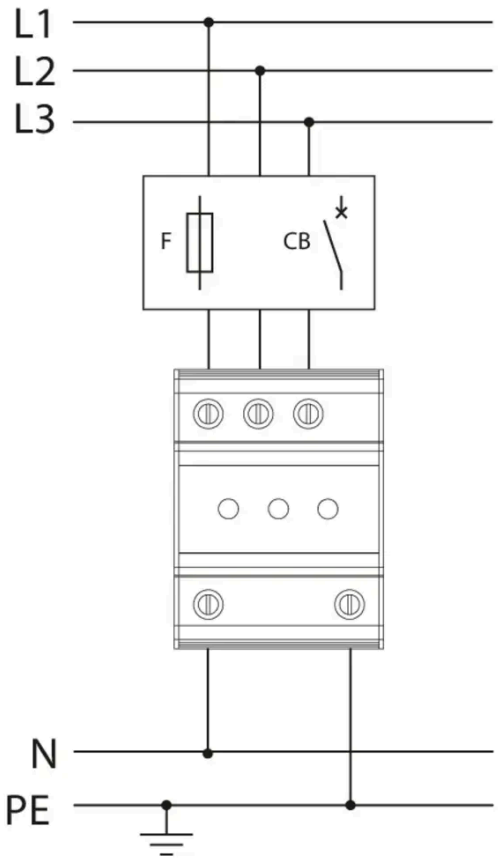

Terminal Information

Terminal Type	
min Capacity	2.5 mm ^{2}
max Capacity	16 mm ^{2}
Torque	2 Nm
Strip Length	

Dimensional Diagram

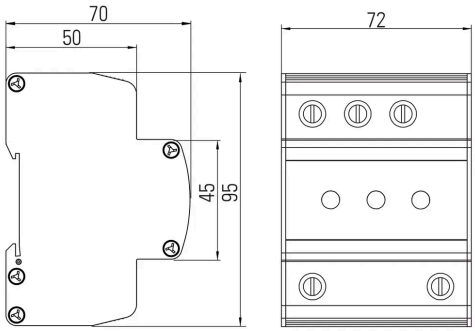

Mounting



Electrical Specifications

Connection type		Shunt
Location		Indoor
Nominal voltage	U_0	230VAC
Short circuit withstand level	I_{SSCR}	50kA
Maximum backup fuse		63A
Recommended SCB		SCB1-3-80
Earth leakage current	I_{PE}	<10µA

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20

Generated Tue Aug 12 2025

72 Browns Road, Kingston Tasmania 7050 Australia
+61 3 6229 7233 sales@novaris.com.au
www.novaris.com.au