


Install Manual

SDN3-150-275




Installation

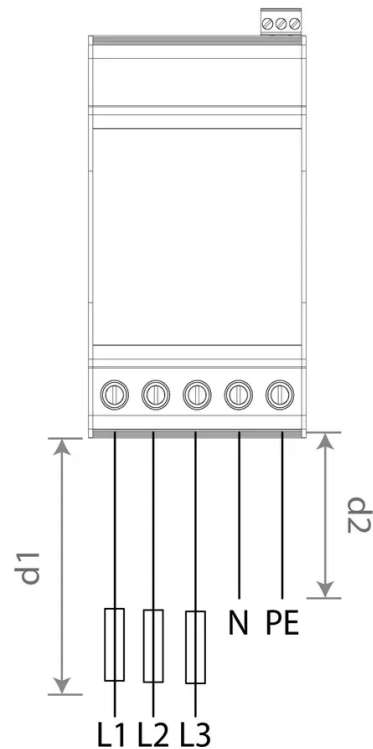

$$d1 + d2 \leq 0,5m$$

Alarm



11-12 open
11-14 closed


Power On

11-12 closed
11-14 open

Power Off


Terminals

Terminal Type



min Capacity	2.5 mm ²	0.5 mm ²
max Capacity	16 mm ²	2.5 mm ²
Torque	2 Nm	0.6 Nm
Strip Length	12mm	5mm

Mounting Information



Electrical Specifications

Connection type		Shunt
Maximum backup fuse		80A
Recommended SCB		SCB1-3-25
Earth leakage current	I_{PE}	<10μA

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail/Optional Panel kit
Environmental rating		IP20