


Install Manual

SDN3-200-275




Installation

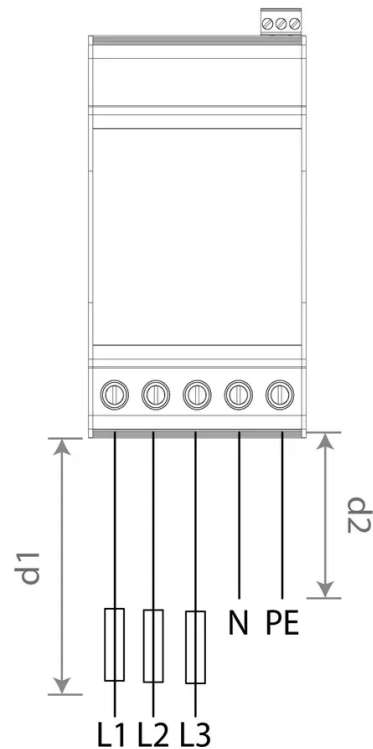

$$d1 + d2 \leq 0,5m$$

Alarm



11-12 open
11-14 closed


Power On

11-12 closed
11-14 open

Power Off

Terminals

Terminal Type



min Capacity

2.5 mm²0.5 mm²

max Capacity


16 mm²2.5 mm²

Torque


2 Nm

0.6 Nm

Strip Length



Mounting Information



Electrical Specifications

Connection type		Shunt
Maximum backup fuse		100A
Recommended SCB		SCB1-3-25
Earth leakage current	I_{PE}	<10μA

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail/Optional Panel kit
Environmental rating		IP20