



# SSP1-16-15-275




## Installation

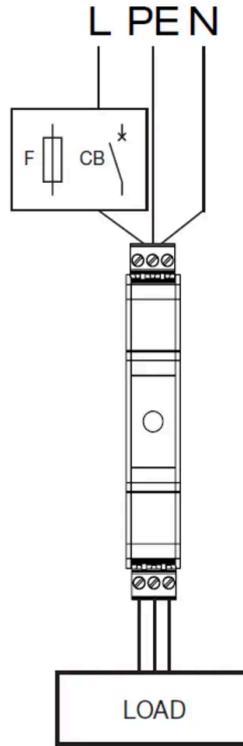


## Dimensions

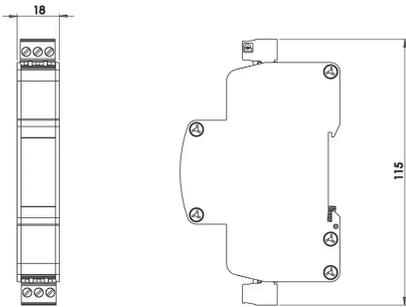

## Terminal Information

|               |  |
|---------------|--|
| Terminal Type |         |
| min Capacity  | 0.5 mm <sup>2</sup>  |
| max Capacity  | 2.5 mm <sup>2</sup>  |
| Torque        | 0.6 Nm  |
| Strip Length  |         |

## Mounting

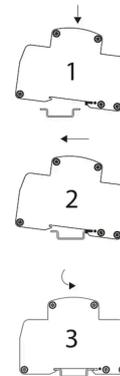

## Specifications

### Electrical Specifications

|                               |   |                 |
|-------------------------------|---|-----------------|
| Connection type               |  | Series          |
| Modes of protection           |  | L-N, L-PE, N-PE |
| Nominal voltage               | $U_0$   | 230VAC          |
| Short circuit withstand level | $I_{SSCR}$  | 10kA            |
| Maximum backup fuse           |  | 16A             |

### Mechanical Specifications

|                               |   |               |
|-------------------------------|---|---------------|
| Minimum operating temperature |  | -40°C         |
| Maximum operating temperature |  | 70°C          |
| Minimum operating humidity    |  | 5%            |
| Maximum operating humidity    |  | 95%           |
| Mounting method               |  | TS35 DIN Rail |
| Environmental rating          |  | IP20          |