

Install Manual

IS-SSP6A-38-G

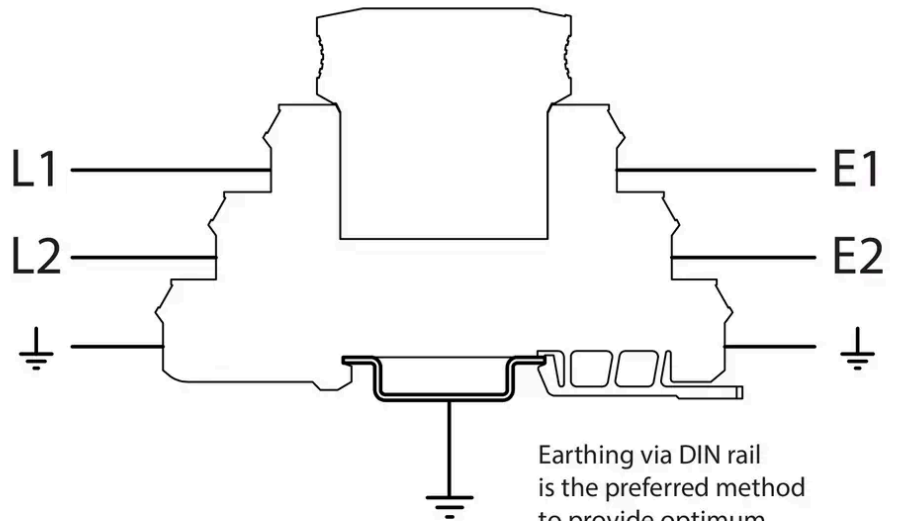


Image for illustrative purposes only

Install

LINE

EQPT




Earthing via DIN rail is the preferred method to provide optimum surge performance


Terminal Information

Terminal Type	
min Capacity	0.5 mm ²
max Capacity	2.5 mm ²
Torque	0.5 Nm
Strip Length	

Mounting

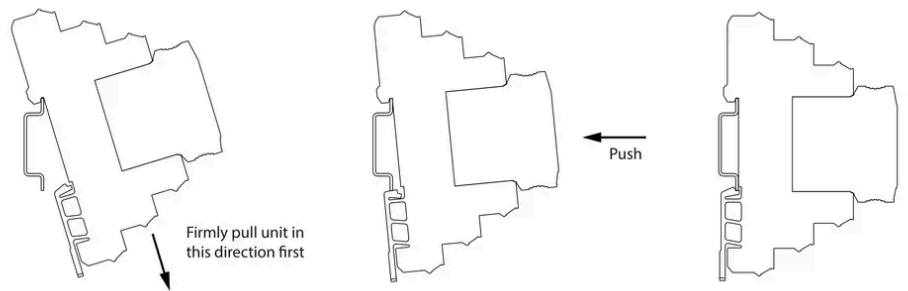

Dimension Information



Module Extraction

