SL1-G90

Install

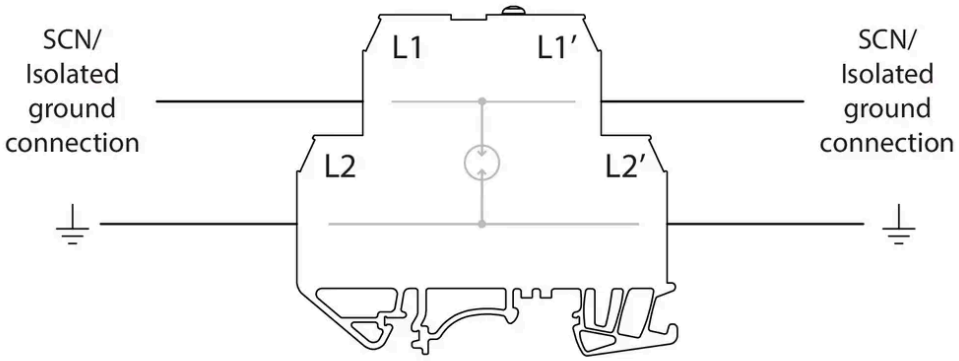

Specifications

Electrical Specifications

Connection type		Series
Maximum continuous voltage (AC)	U_c	90V

Mechanical Specifications

Minimum operating temperature		-25°C
Maximum operating temperature		70°C
Mounting method		Universal TS32 and TS35 rail
Environmental rating		IP20
Terminal capacity		2.5mm²
Terminal screw torque		0.4Nm

72 Browns Road, Kingston Tasmania 7050 Australia
+61 3 6229 7233 sales@novaris.com.au
www.novaris.com.au