



# SLD1-MPU9



## Installation




## Dimensions

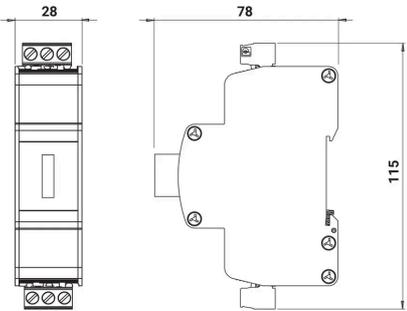

## Terminal Information

Terminal Type	
min Capacity	0.5 mm <sup>2</sup>
max Capacity	2.5 mm <sup>2</sup>
Torque	0.6 Nm
Strip Length	5mm

## Mounting



## Specifications

### Electrical Specifications

Connection type		Series
Modes of protection		Transverse, Common
Maximum continuous voltage (DC)	U <sub>c</sub>	32V
Maximum continuous voltage (AC)	U <sub>c</sub>	22V
Maximum load current	I <sub>L</sub>	2A

### Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		85°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20