


## Install manual

## GDT-H2-6G



## Install

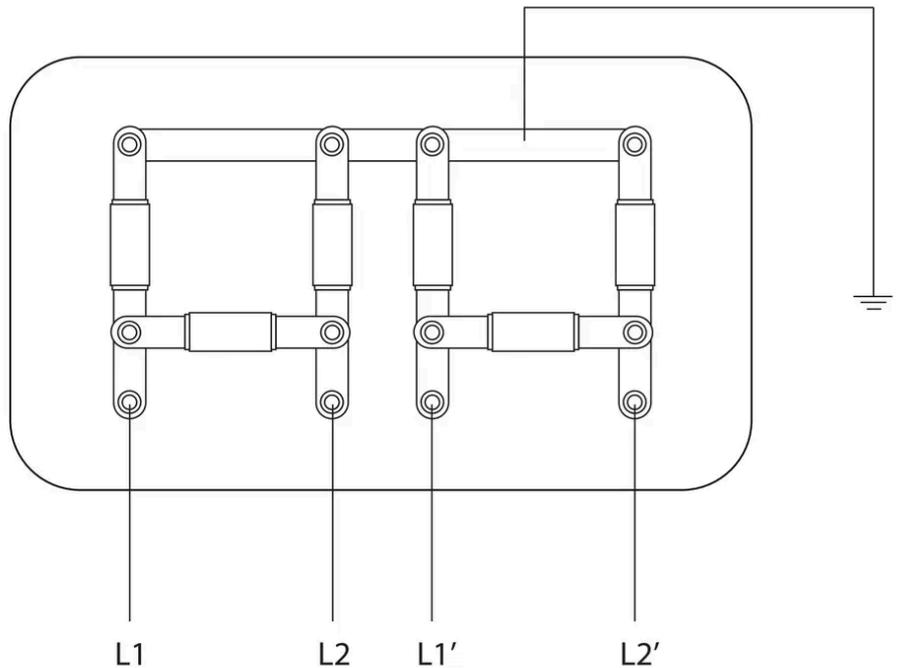

## Specifications

## Electrical Specifications

DC spark over voltage	$U_c$	350V
-----------------------	-------	------

## Mechanical Specifications

Minimum operating temperature	⊖	-40°C
Maximum operating temperature	⊕	65°C
Minimum operating humidity	💧	5%
Maximum operating humidity	💧	95%
Mounting method	🔧	DIN TS35
Environmental rating	🌀	IP67
Terminal capacity	⊙	M6

V2 - Approved - 2026/02/13