

Install Manual

IS-SSP6A-65-G

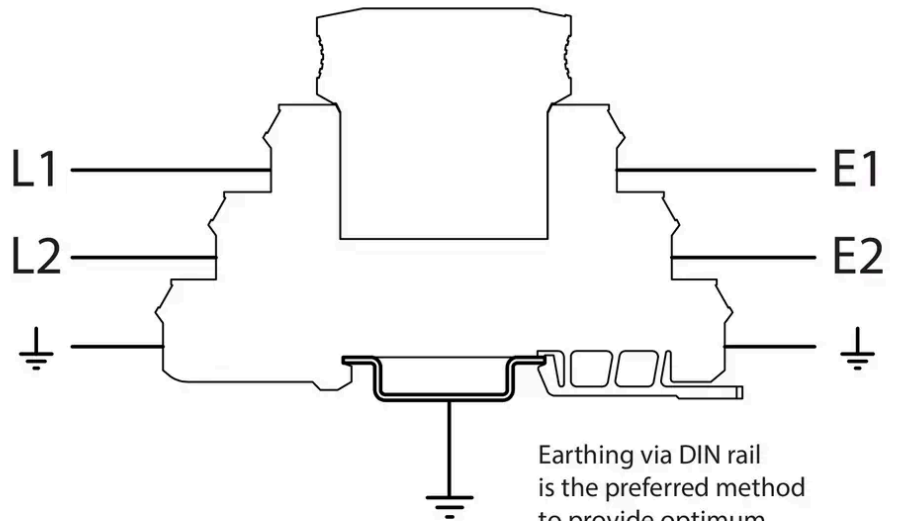


Image for illustrative purposes only

Install

LINE

EQPT




Earthing via DIN rail is the preferred method to provide optimum surge performance


Terminal Information

| | |
|---------------|---------------------|
| Terminal Type | |
| min Capacity | 0.5 mm ² |
| max Capacity | 2.5 mm ² |
| Torque | 0.5 Nm |
| Strip Length | |

Mounting

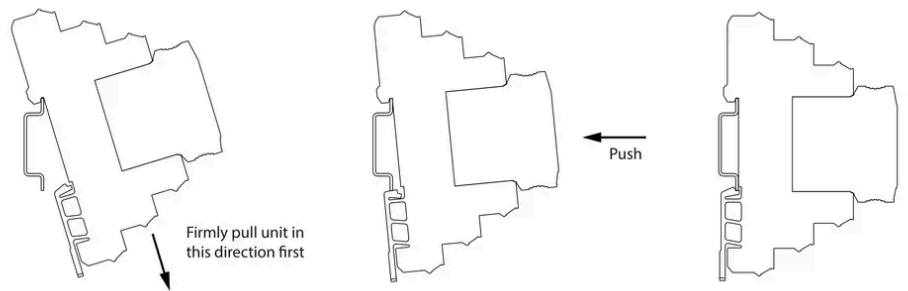

Dimension Information



Module Extraction

