


Install Manual


NSP3-40-320



Install

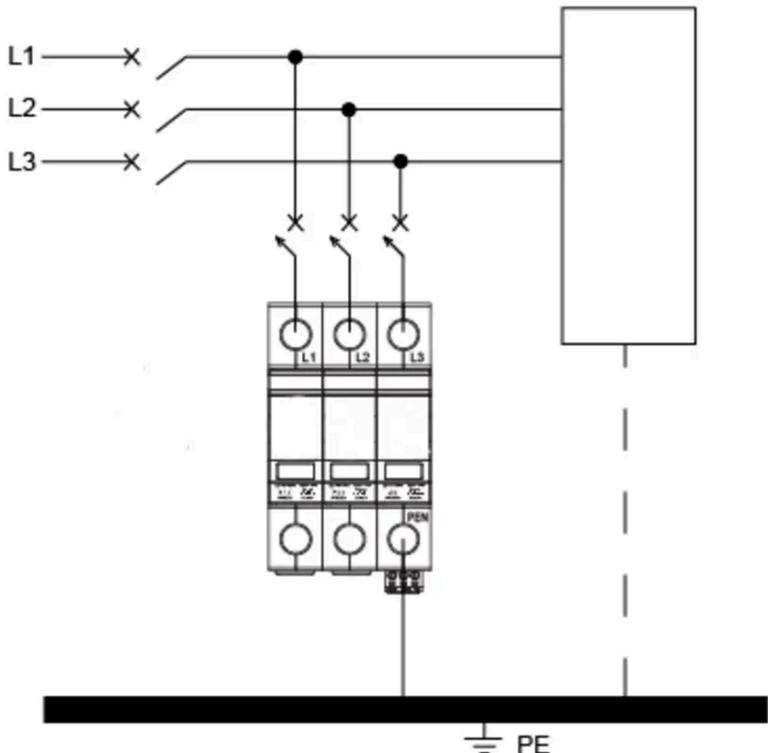


Alarm




No- C open	✓
Nc- C closed	✗
No- C closed	✗
Nc- C open	✗

Mounting

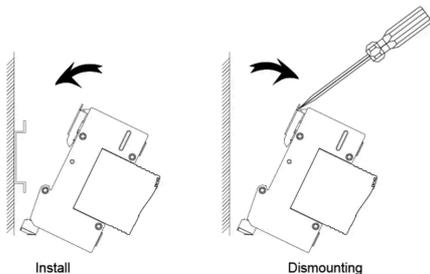

Dimensions

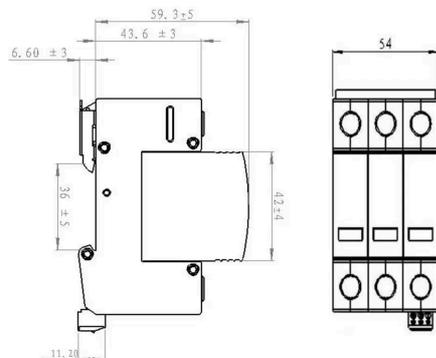

Electrical Specifications

Connection type		Shunt
Location		Indoor
Nominal voltage	U_0	230VAC
Earth leakage current	I_{PE}	<10µA

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Mounting method		TS35 DIN Rail
Environmental rating		IP20
Terminal capacity - power		35mm²
Terminal capacity - alarms		1.5mm²