


Install Manual


NSP3-50-275-N




Installation

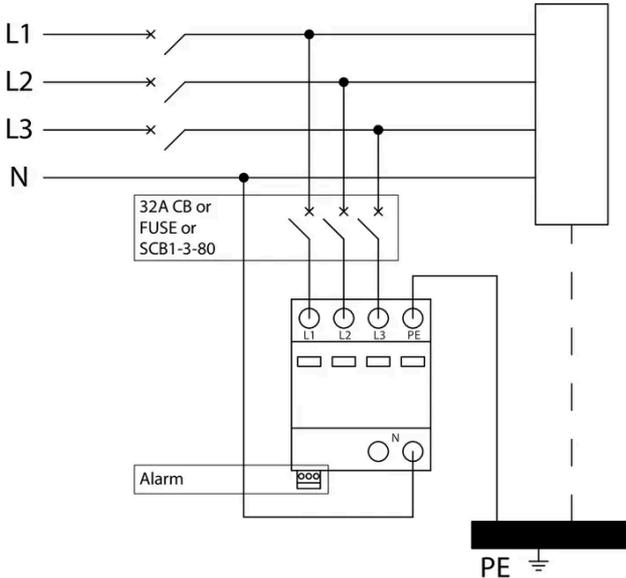


Alarm

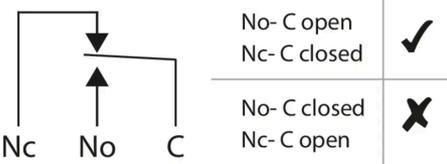

Mounting



Dimensions

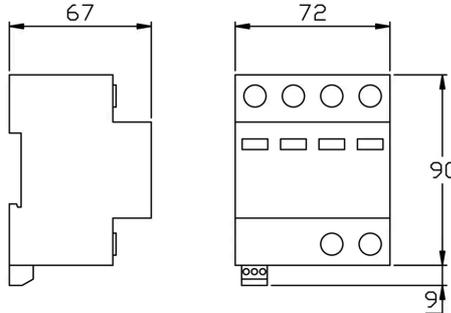

Electrical Specifications

Connection type		Shunt
Location		Indoor
Nominal voltage	U_0	230VAC
Recommended SCB		SCB1-3-80
Earth leakage current	I_{PE}	<10μA

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20
Terminal capacity - power		35mm²
Terminal capacity - alarms		1.5mm²

V1 - Approved - 2026/01/20