


Install Manual

IFD2-10-50-275




Installation

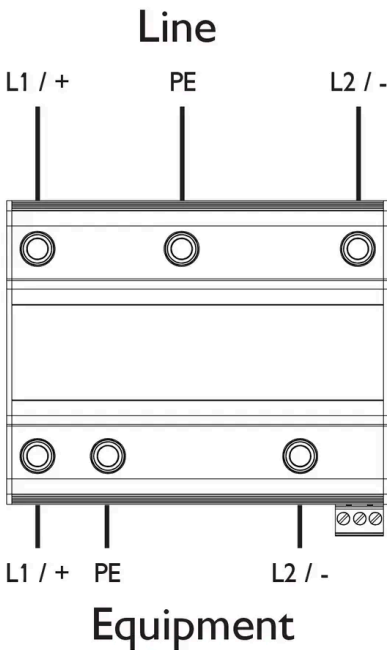


Unit is non polarised for DC Applications

Mounting

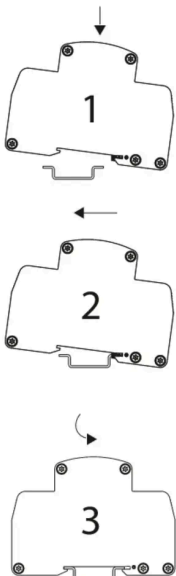


Alarm



Terminals

| Terminal Type |                     |                     |
|---------------|---------------------|---------------------|
| min Capacity  | 2.5 mm <sup>2</sup> | 0.5 mm <sup>2</sup> |
| max Capacity  | 16 mm <sup>2</sup>  | 2.5 mm <sup>2</sup> |
| Torque        | 2 Nm                | 0.6 Nm              |
| Strip Length  | 12mm                | 5mm                 |

Dimensions

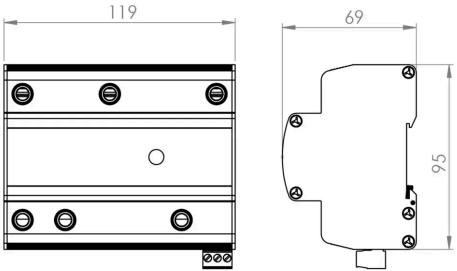

Electrical Specifications

|                     |                |        |
|---------------------|----------------|--------|
| Connection type     |                | Series |
| Nominal voltage     | U <sub>o</sub> | 230VAC |
| Maximum backup fuse |                | 10A    |

Mechanical Specifications

|                               |  |               |
|-------------------------------|--|---------------|
| Minimum operating temperature |  | -40°C         |
| Maximum operating temperature |  | 70°C          |
| Minimum operating humidity    |  | 5%            |
| Maximum operating humidity    |  | 95%           |
| Mounting method               |  | TS35 DIN Rail |
| Environmental rating          |  | IP20          |