


Install Manual

IFD2-32-100-275




Installation

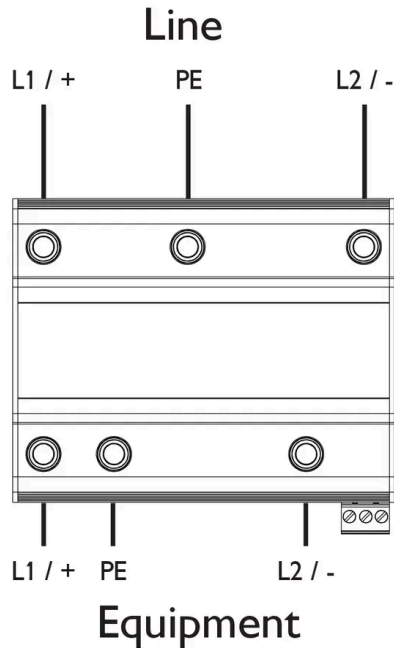


Unit is non polarised for DC Applications

Mounting

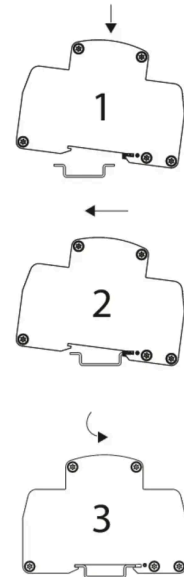


Alarm



11-12 open 11-14 closed	Power On
11-12 closed 11-14 open	Power Off


Terminals

Terminal Type



min Capacity	2.5 mm ²	0.5 mm ²
max Capacity	16 mm ²	2.5 mm ²
Torque	2 Nm	0.6 Nm
Strip Length	12mm	5mm

Dimensions

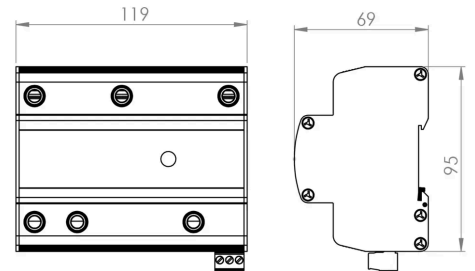

Electrical Specifications

Connection type		Series
Nominal voltage	U_o	230VAC
Maximum backup fuse		32A

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20