


Install Manual

# IFD2-32-50-275




## Installation

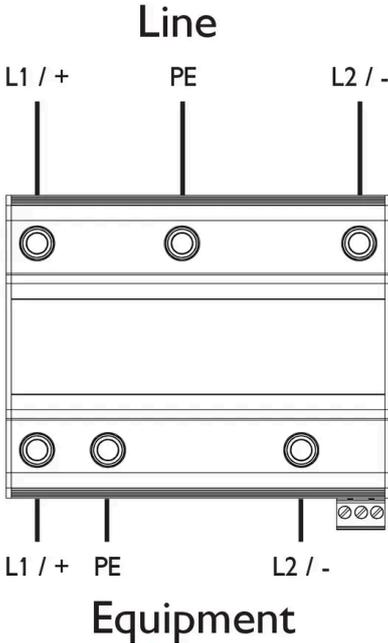


Unit is non polarised for DC Applications

## Mounting

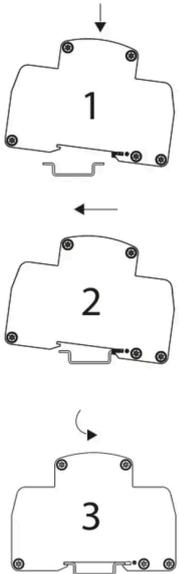

## Alarm




11-12 open	Power On
11-14 closed	
11-12 closed	Power Off
11-14 open	

## Terminals

Terminal Type		
min Capacity	2.5 mm <sup>2</sup>	0.5 mm <sup>2</sup>
max Capacity	16 mm <sup>2</sup>	2.5 mm <sup>2</sup>
Torque	2 Nm	0.6 Nm
Strip Length		

## Dimensions

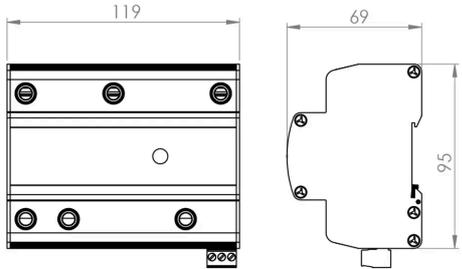

### Electrical Specifications

Connection type		Series
Nominal voltage	$U_0$	230VAC
Maximum backup fuse		32A

### Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20