



# ISP2-16-10-50



## Installation

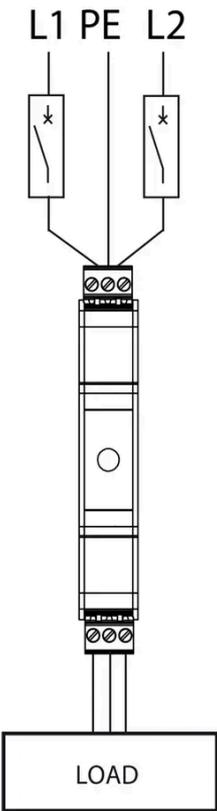


## Dimensions

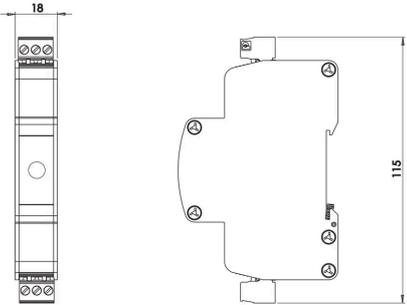

## Terminal Information

Terminal Type	
min Capacity	0.5 mm <sup>2</sup>
max Capacity	2.5 mm <sup>2</sup>
Torque	0.6 Nm
Strip Length	

## Mounting



## Specifications

### Electrical Specifications

Connection type		Series
Modes of protection		L1-L2, L1-PE, L2-PE
Nominal voltage	U <sub>0</sub>	45VAC
Short circuit withstand level	I <sub>sCCR</sub>	10kA
Maximum backup fuse		16A

### Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20