



ISP2-16-15-275



Installation

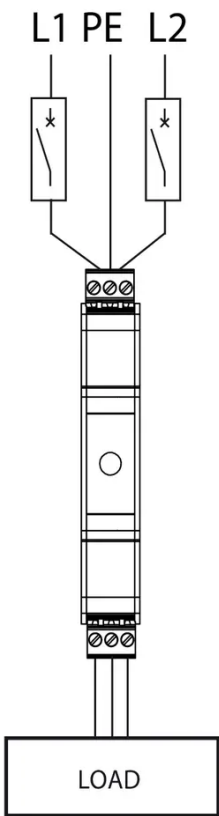


Dimensions

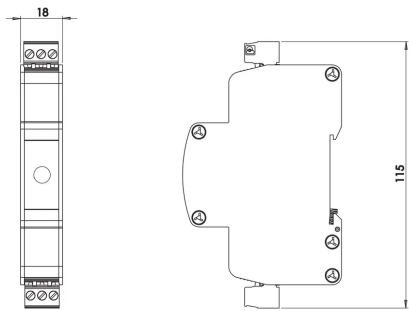

Terminal Information

|               |                     |
|---------------|---------------------|
| Terminal Type |                     |
| min Capacity  | 0.5 mm <sup>2</sup> |
| max Capacity  | 2.5 mm <sup>2</sup> |
| Torque        | 0.6 Nm              |
| Strip Length  |                     |

Mounting

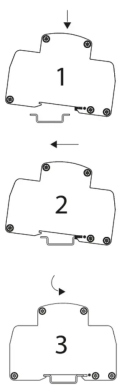

Specifications

Electrical Specifications

|                               |            |                     |
|-------------------------------|------------|---------------------|
| Connection type               |            | Series              |
| Modes of protection           |            | L1-L2, L1-PE, L2-PE |
| Nominal voltage               | $U_0$      | 230VAC              |
| Short circuit withstand level | $I_{sccr}$ | 10kA                |
| Maximum backup fuse           |            | 16A                 |

Mechanical Specifications

|                               |  |               |
|-------------------------------|--|---------------|
| Minimum operating temperature |  | -40°C         |
| Maximum operating temperature |  | 70°C          |
| Minimum operating humidity    |  | 5%            |
| Maximum operating humidity    |  | 95%           |
| Mounting method               |  | TS35 DIN Rail |
| Environmental rating          |  | IP20          |